



拓鸿机电(上海)有限公司

TOP MECHANICAL & ELECTRICAL (SHANGHAI) CO.,LTD.

地址: 上海市杨浦区国宾路36号万达广场B座2407室

电话: 021-62569266

传真: 021-62118628

Add: Room 2407, Block B, Wanda Plaza, 36 Guobin Road,
Yangpu District, Shanghai

Tel: +86-21-62569266

Fax: +86-21-62118628

<http://www.top-gr.cn>

东一阀门制造(南通)有限公司

TOP VALVES MANUFACTURE (NANTONG) CO.,LTD.

地址: 江苏省启东市高新技术产业开发区东海路23号

电话: 0513-83833315

传真: 0513-83601092

Add: No.23, High-tech Industrial Development Zone, Qidong
City, Jiangsu Province

Tel: +8513-83833315

Fax: +8513-83601092

<http://www.top-gr.com>

E-mail: sales@top-gr.com

诚招代理商

注: 由于本公司系列产品手册不断进行更新, 本公司保留对说明书的修改权利, 最终解释权归本公司所有。

Note: Since the company's series of product manuals are constantly updated, the company reserves the right to modify the specifications, the final interpretation right belongs to the company.

综合阀门系列

Integrated Valve Series



 **东一阀门制造(南通)有限公司**
TOP VALVES MANUFACTURE (NANTONG) CO.,LTD.



企业简介 Brief Introduction

东一阀门制造(南通)有限公司成立于2006年4月，注册资金8000万，注册商标“东一”，是阀门、传动机构等机电设备的专业研发生产型企业。公司位于江苏省启东市高新技术产业开发区东海路23号，占地50余亩，标准厂房15000m²，员工逾100人。是中国通用协会阀协会会员单位、中核集团合格供应商，是国家及行业多项阀门标准的起草单位，已先后取得ISO9001、TS(中国特种设备制造许可A1级)、API、CE等认证。

东一阀门制造(南通)有限公司的管理、技术、生产核心团队由外籍及国内知名专家组成，在传承国内外先进成熟的工业阀门制造经验基础上，利用多渠道开展国际性技术研发与合作，吸收国内外先进技术精华，不断推出各种标准和特殊订制的高新技术流体控制产品，为客户提供优秀的全方位流体控制集成解决方案。

东一阀门南通工厂配备了CNC加工中心、CNC数控机床、立车、铣床、磨床等各式现代化机加工设备近100台，材料拉伸试验机、硬度计、光谱分析仪、超声波探伤、理化实验室、CL2500级超低温深冷试验装置等，检测试验设备与措施齐全完善，产品质量从原材料到生产到最终出厂的每一环节控制都得到了有力保障。

东一阀门的产品主要采用美国API、ANSI、英国BS、德国DIN、法国NF、日本JIS、JPI、中国GB等国际先进标准、可生产公称尺寸1/4"-80"(DN6-DN2000mm)，公称压力150LB-2500LB，工作温度-196℃~680℃的闸阀、截止阀、球阀、止回阀、蝶阀等；材料主要有球铁、碳钢、合金钢、不锈钢、双相不锈钢、司太立、蒙乃尔等；还可根据用户要求制造各种特殊阀门。

东一阀门南通公司成立以来，便以高效卓越的管理模式、雄厚强力的研发团队、精湛扎实的生产工艺、质量优异的可靠产品，博得众多国外品牌的青睐，成为其长期稳定的生产合作伙伴。基于对中国不断前进发展的信心，东一阀门已适时调整战略发展方向，在保持扩大与国外品牌合作的同时，大力拓展国内市场，为建设富强中国努力贡献！


TOP VALVE MANUFACTURING(NAN TONG) CO.,LTD was established in April 2006 with a registered capital of 80million yuan and a registered trademark of "TOP". It is a professional r & D and production enterprise of valve, transmission mechanism and other mechanical and electrical equipment. The company is located in No. 23, Donghai Road, High-tech Industrial Development Zone, Qidong city, Jiangsu Province, covering an area of more than 50 mu, with a standard workshop of 15000m² and more than 100 employees. It is a member of China General Assembly Valve Association and a qualified supplier of China National Nuclear Corporation. It is the drafting unit of many national and industrial valve standards and has successively obtained ISO9001, TS(China Special Equipment Manufacturing License A1 level), API, CE and other certifications.

Company's management team, technicians and production core teams are all composed of well-known experts, on basis of mature industrial valve manufacturing experience at home and abroad, digesting and absorbing advanced technology, taking advantage of various channels to carry out technical cooperation and exchanges. After nearly 10 years of development and innovation, the formation of a series of water valve, high temperature, high pressure and low temperature valve series as the leading product structure, able to provide customers with comprehensive industrial valves integration solutions.

TOP VALVE MANUFACTURING(NANTONG) CO.,LTD is equipped with 100 sets of modern processing machines such as CNC machining center, CNC machine tool, vertical milling machine, grinding machine. As well, Material tensile testing machine, hardness tester, spectrum analyzer, ultrasonic testing, physical and chemical laboratory, CL2500 class ultra-low temperature depth device have been applied. The whole series of equipment and device ensure the quality from raw material to delivery.

Company's products mainly based on API, ANSI, British BS, German DIN, French NF, Japanese JIS and JPI, China GB international advanced standards, with production sizes ranging from 1/4" - 120" (DN8 - DN3000), pressure rating of 150Lb-900Lb, working temperature -196℃ - 680℃ for gate valve, globe valve, ball valve, check valve, butterfly valve, hydraulic control valves, etc.; Materials of construction are mainly ductile iron, carbon steel, alloy steel, stainless steel and various special materials to suit customer's requirements.



Since its establishment, TOP VALVE MANUFACTURING(NAN TONG) CO.,LTD has won the favor of many foreign brands and become its long-term stable production partner with its efficient and excellent management mode, strong and powerful research and development team, exquisite and solid production technology and reliable products with excellent quality. Based on the confidence of China's continuous development, TOP VALVE MANUFACTURING(NANTONG) CO.,LTD has timely adjusted the strategic development direction, while maintaining the expansion of cooperation with foreign brands, vigorously expand the domestic market, and contribute to the construction of a prosperous and powerful China!

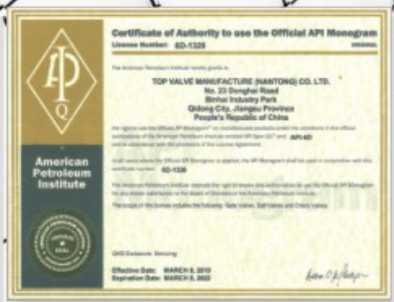

东一阀门
TOP VALVES

东一阀门以市场为导向，以客户为中心，以质量求生存，以效率求发展，求真务实，开拓创新，用优质的产品服务于广大客户。

TOP valves takes the market as the guide, takes the customer as the center, strives for the survival by the quality, strives for the development by the efficiency, is realistic, develops the innovation, USES the high quality product to serve in the general customers.

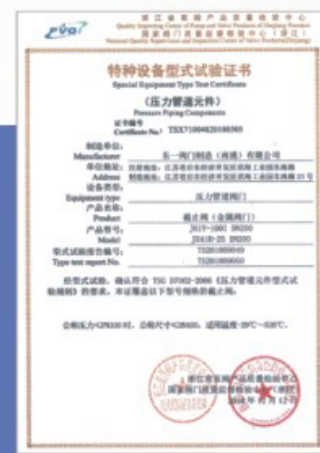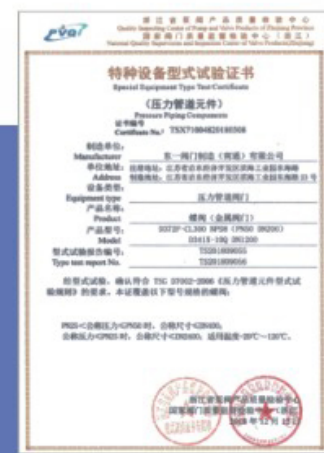

工业阀门系列 Industrial Valve Series	01
球阀系列 Ball Valve Series	05
蝶阀系列 Butterfly Valve Series	07
控制调节阀系列 Control Valve Series	09
低温阀系列 Cryogenic Valve Series	11
水处理阀门系列 Water Treatment Valve Series	15



钢制闸阀 Cast Steel Gate Valve



公称通径 Nominal diameter	DN15 ~ DN1200mm	公称压力 Nominal pressure	1.6 ~ 42.0MPa
适用温度 Applicable temperature	-196 ~ 550°C	驱动方式 Driving mode	手动、电动、齿轮动 Manual, electric, gear driven
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/WC1/WC6/WC9/ C5/CF8/CF8M/CF8C/ CF3/CF3M/ZG1Cr18Ni9Ti/ ZG1Cr18Ni12Mo2Ti	阀座材质 Seat material	A105/304/1Cr5Mo /12Cr1MoV/13Cr/F304+STL /F316+STL/A105+13Cr/ A105+STL/CF8/CF8M
适用介质 Applicable media	水、油、蒸汽、酸碱 Water, oil, steam, acid and base	应用场合 Applications	能源、污水、石油、化工 Energy, sewage, petroleum, chemical industry

(无) 导流孔平板闸阀 (No) Guide Hole Flat Gate Valve



公称通径 Nominal diameter	DN25 ~ DN1000	公称压力 Nominal pressure	1.6 ~ 42.0MPa
适用温度 Applicable temperature	≤ 120°C	驱动方式 Driving mode	齿轮、气动、液动、电动、手轮 Gear, pneumatic, hydraulic, electric, handwheel
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/304	阀座材质 Seat material	16Mn+PTFE/A105+PTFE/ 1Cr18Ni9+PTFE
适用介质 Applicable media	成品油、原油、天然气等 Product oil, crude oil, natural gas etc	应用场合 Applications	石油、化工、环保、城市管道、 燃气管线 Petroleum, chemical industry, environmental protection, city pipeline, gas pipeline

钢制截止阀 Cast Steel Globe Valve



公称通径 Nominal diameter	DN15 ~ DN450mm	公称压力 Nominal pressure	1.6 ~ 42.0MPa
适用温度 Applicable temperature	-196 ~ 500°C	驱动方式 Driving mode	手动、齿轮、电动 Manual, gear, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/WC1/WC9/C5/ CF8/CF8M/CF8C/CF3/ CF3M/25/ZG1Cr18Ni9Ti	阀杆材质 Stem material	1Cr13/2Cr13/1Cr18Ni9/ 0Cr18Ni12Mo2Ti/20Cr1Mo1v/ 25Cr2MoV/F304/F6a/304L
适用介质 Applicable media	水、油、气、硝酸类、醋酸类等 Water, oil, gas, nitric acid, acetic acid etc	应用场合 Applications	石油、化工、制药、化肥、电力、 火力电站 Petroleum, chemical industry, pharmaceutical, chemical fertilizer, electric power, thermal power station

波纹管截止阀 Bellows Globe Valve


公称通径 Nominal diameter	DN15 ~ DN1200mm	公称压力 Nominal pressure	1.6 ~ 4.0MPa
适用温度 Applicable temperature	-196 ~ 500°C	驱动方式 Driving mode	手动、气动 Manual and pneumatic
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/WC1/WC9/C5/CF8/ CF8M/CF8C/CF3/CF3M/ 25/ZG1Cr18Ni9Ti	阀芯材质 Core material	1Cr13/2Cr13/1Cr18Ni9/ 0Cr18Ni12Mo2Ti/20Cr1Mo1v /25Cr2MoV/F304/F6a/304L
适用介质 Applicable media	水、油、气、硝酸类、醋酸类等 Water, oil, gas, nitric acid, acetic acid, etc	应用场合 Applications	石油、化工、制药、化肥、电力行业 Petroleum, chemical, pharmaceutical chemical fertilizer and electric power industries

旋启式止回阀 Swing Check Valve


公称通径 Nominal diameter	DN15 ~ DN600	公称压力 Nominal pressure	1.6 ~ 42.0MPa
适用温度 Applicable temperature	-196 ~ 425	驱动方式 Driving mode	
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/WC1/WC6/WC9/C5/CF8 /CF8M/CF8C/CF3/CF3M/SS304 /SS316/HT250	阀座材质 Seat material	A105/F11/F22/F5/F9/F304/CF8M/CF8 /F316/F321/F304L/F316L/25 /1Cr18Ni9Ti/20Cr1Mo1V/15CrMo1V /12CrMo1V/304+STL/A105+13Cr
适用介质 Applicable media	水、油、气 Water, oil, gas	应用场合 Applications	石油、化工、电力 Petroleum, chemical, electric power

升降式止回阀 Lift Check Valve


公称通径 Nominal diameter	DN10 ~ DN500mm	公称压力 Nominal pressure	1.0 ~ 10.0MPa
适用温度 Applicable temperature	-196 ~ 425°C	驱动方式 Driving mode	
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/SS304/SS316/CF8	阀瓣材质 Disc material	WCB/SS304/SS316/304/2Cr13
适用介质 Applicable media	水、油、蒸汽 Water, oil, steam	应用场合 Applications	石油、化工、电力 Petroleum, chemical, electric power

轴流式止回阀 Axial Flow Check Valve


公称通径 Nominal diameter	DN15 ~ DN600mm	公称压力 Nominal pressure	1.6 ~ 2.5MPa
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	A105/WCB/F304/F316/ CF8/CF8M/2205/WCB+13Cr	阀座材质 Seat material	13Cr、304、Stellite
适用介质 Applicable media	水、油、蒸汽 Water, oil, steam	应用场合 Applications	工业及管线用 Industrial and pipeline applications

对夹式止回阀 Wafer Check Valve


公称通径 Nominal diameter	DN50 ~ DN1200mm	公称压力 Nominal pressure	1.0 ~ 16.0MPa
适用温度 Applicable temperature	-15~80°C	驱动方式 Driving mode	
连接方式 Connection mode	对夹 Wafer	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/WCB	阀座材质 Seat material	CF8+STL/WCB+STL
适用介质 Applicable media	水、油、蒸汽 Water, oil, steam	应用场合 Applications	管路系统 Pipeline system

真空闸阀 Vacuum Gate Valve


公称通径 Nominal diameter	DN10 ~ DN350mm	公称压力 Nominal pressure	4.0 ~ 15.0MPa
适用温度 Applicable temperature	-196 ~ 200°C	驱动方式 Driving mode	手动、电动 Manual, electric
连接方式 Connection mode	对焊 Butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	A105/ZG1Cr5Mo	阀座材质 Seat material	2Cr13/25Cr2Mo1VA
适用介质 Applicable media	水、蒸汽等 Water, steam etc	应用场合 Applications	火电厂汽机冷凝和真空负压系统 Steam condensing and vacuum negative pressure system in thermal power plant

真空截止阀 Vacuum Glove Valve


公称通径 Nominal diameter	DN10 ~ DN350mm	公称压力 Nominal pressure	4.0 ~ 15.0MPa
适用温度 Applicable temperature	-196 ~ 200℃	驱动方式 Driving mode	手动、电动 Manual, electric
连接方式 Connection mode	对焊 Butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	A105/ZG1Cr5Mo	阀杆材质 Stem material	2Cr13/25Cr2Mo1VA
适用介质 Applicable media	水、蒸汽等 Water, steam etc	应用场合 Applications	火电厂汽机冷凝和真空负压系统 Steam condensing and vacuum negative pressure system in thermal power plant

隔膜阀 Diaphragm Valve


公称通径 Nominal diameter	DN15 ~ DN300mm	公称压力 Nominal pressure	0.6 ~ 2.5MPa
适用温度 Applicable temperature	-196 ~ 220℃	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT250/WCB/CF8/CF8M/CF3/CF3M	隔膜材质 Diaphragm material	FEP/F46/CR/PFA/FPOM/FPDM
适用介质 Applicable media	水、油、蒸汽 Water, oil, steam	应用场合 Applications	化工、食品、医药、电厂、造纸等 Chemical industry, food, medicine, power plant, papermaking, etc

盲板阀 Blind Valve


公称通径 Nominal diameter	DN300 ~ DN2000mm	公称压力 Nominal pressure	0.5 ~ 2.5MPa
适用温度 Applicable temperature	-196 ~ 86℃	驱动方式 Driving mode	液动、电动、气动 Hydraulic, electric and pneumatic
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	碳钢、铸铁 Carbon steel, cast iron	阀芯材质 Core material	
适用介质 Applicable media	煤气及有毒、有害、易燃气体 Gas and poisonous, harmful and flammable gases	应用场合 Applications	冶金、化工、环保等 Metallurgy, chemical industry, environmental protection etc

浮动球阀 Floating Ball Valve


公称通径 Nominal diameter	DN15 ~ DN600mm	公称压力 Nominal pressure	1.0 ~ 11.0MPa
适用温度 Applicable temperature	-196℃~550℃	驱动方式 Driving mode	电动、气动、涡轮传动 Electric, pneumatic, turbine drive
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/WCB/ZGCr5Mo/ ZG00Cr17Ni14Mo2 /LCB/CF3/CF3MLCC/LCB	阀杆材质 Stem material	2Cr13、1Cr18Ni9Ti、304、304L、 316、316L、F6A、F304、17-4PH
适用介质 Applicable media	水、蒸汽、油品、硝酸、液化气、 醋酸等腐蚀性介质 Water, steam, oil, nitric acid, liquefied gas, acetic acid and other corrosive media	应用场合 Applications	化工、石油、天然气、冶金、药业、 环保、给排水等 Chemical industry, petroleum, natural gas, metallurgy, pharmaceutical, environmental protection, water supply and drainage etc

固定球阀 Trunnion Mounted Ball Valve


公称通径 Nominal diameter	DN15 ~ DN1400mm	公称压力 Nominal pressure	1.0 ~ 42.0MPa
适用温度 Applicable temperature	-46 ~ 425℃	驱动方式 Driving mode	气动、涡轮、电动 Pneumatic, turbine, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/LCB/CF8/A105/1Cr18Ni9Ti /304/304L/CF3/CF3M/CF8M/ 316/316L	阀杆材质 Stem material	410+HGR/403+HGR/304+HGR/ 316+HGR/304/2Cr13/304L/316 /316L/F6a
适用介质 Applicable media	水、油、天然气、腐蚀性介质、硝 酸、醋酸、尿素、强氧化性介质等 Water, oil, natural gas, corrosive medium, nitric acid, acetic acid, urea, strong oxidizing medium, etc	应用场合 Applications	石油、化工、燃气、电力、环保 Petroleum, chemical industry, gas, electric power, environmental protection

上装式球阀 Jacket Ball Valve


公称通径 Nominal diameter	DN15 ~ DN1400mm	公称压力 Nominal pressure	1.0 ~ 42.0MPa
适用温度 Applicable temperature	-196 ~ 600℃	驱动方式 Driving mode	涡轮、气动、电动 Turbine, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/CF3/CF3M/WCB/A105/ 1Cr18Ni9Ti/304/304L/316/316L/ LCB/LCC	阀杆材质 Stem material	304/2Cr13/316/316L/304L 1Cr18Ni9Ti/1Cr13/410/420/LF2
适用介质 Applicable media	醋酸、强氧化性、硝酸、尿素类 腐蚀性介质、水、油、天然气等 Acetic acid, strong oxidation, nitric acid, urea corrosive medium, water, oil, natural gas, etc	应用场合 Applications	石油、化工、天然气等 Petroleum, chemical, natural gas, etc

全焊接球阀 All Welded Ball Valve


公称通径 Nominal diameter	DN50 ~ DN1400mm	公称压力 Nominal pressure	1.6 ~ 42.0MPa
适用温度 Applicable temperature	-29 ~ 200°C	驱动方式 Driving mode	涡轮、气动、手柄 Turbine, pneumatic, handle
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	A105/304/316	阀杆材质 Stem material	2Cr13/F316/316
适用介质 Applicable media	水、油、天然气、腐蚀性介质 Water, oil, natural gas, corrosive medium	应用场合 Applications	城市煤气、集中供热、热交换机、钢铁厂、工业设备 City gas, central heating, heat exchanger, steel works, industrial equipment

偏心半球阀 Eccentric Half Ball Valve


公称通径 Nominal diameter	DN50 ~ DN1400mm	公称压力 Nominal pressure	1.6 ~ 6.4MPa
适用温度 Applicable temperature	-29 ~ 540°C	驱动方式 Driving mode	涡轮、气动 Turbine, pneumatics
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/ZG1Cr18Ni9Ti/ ZG1Cr18Ni12Mo2Ti/CF8	阀杆材质 Stem material	2Cr13/1Cr18Ni9Ti/0Cr18Ni12Mo2Ti/ 420/304/316
适用介质 Applicable media	水、蒸汽、油、醋酸、硝酸、煤粉等 Water, steam, oil, acetic acid, nitric acid, pulverized coal, etc	应用场合 Applications	石油、化工、冶炼、给排水、医药、环保 Petroleum, chemical industry, smelting, water supply and drainage, medicine, environmental protection

V型球阀 V-shaped Ball Valve


公称通径 Nominal diameter	DN25 ~ DN600mm	公称压力 Nominal pressure	1.6 ~ 10.0MPa
适用温度 Applicable temperature	-196 ~ 200°C	驱动方式 Driving mode	涡轮、气动、电动 Turbine, pneumatic, electric
连接方式 Connection mode	对夹、法兰 Clamp, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/WCB/CF8M/ZG0Cr18Ni9	阀芯材质 Spool material	304/2Cr13/316/17-4PH/0Cr18Ni9
适用介质 Applicable media	水、蒸汽、油、硝酸、醋酸、氧化性介质、尿素等 Water, steam, oil, nitric acid, acetic acid, oxidizing medium, urea, etc	应用场合 Applications	石油、化工、医药、环保 Petroleum, chemical industry, medicine, environmental protection

衬里防腐球阀 Lined Anti-corrosion Ball Valve


公称通径 Nominal diameter	DN15 ~ DN600mm	公称压力 Nominal pressure	1.0~4.0MPa
适用温度 Applicable temperature	-80°C~200°C	驱动方式 Driving mode	手动、气动 Manual and pneumatic
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/CF3/CF3M/WCB/HT250	阀座材质 Seat material	FEP(F46)/ETFE(F40)/PFA/PCTFE /PVDF/PP/PE/PO/PVC
适用介质 Applicable media	液体、气体、酸、碱 Liquid, gas, acid, base	应用场合 Applications	石油、化工、医药、环保、给排水 Petroleum, chemical industry, medicine, environmental protection, water supply and drainage

中线软密封蝶阀 Center line soft seal butterfly valve


公称通径 Nominal diameter	DN50 ~ DN120mm	公称压力 Nominal pressure	150Lb(PN10 ~ PN16)
适用温度 Applicable temperature	-40°C~120°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对夹、法兰、卡箍 Wafer, flange, clamp	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB/304/316	阀座材质 Seat material	NBR/EPDM/FPM/PTFE/ 硅橡胶 Silicone rubber
适用介质 Applicable media	水、污水、海水、气体、食品、油类、酸碱类 Water, sewage, sea water, gas, food, oil, acid and base	应用场合 Applications	给排水、化工、石油、环保、空调、食品、医药、能源系统 Water supply and drainage, chemical industry, petroleum, environmental protection, air conditioning, food, medicine, energy system

衬里防腐蝶阀 Lined Anticorrosive Butterfly Valve


公称通径 Nominal diameter	DN40 ~ DN1200mm	公称压力 Nominal pressure	150Lb(PN10 ~ PN16)
适用温度 Applicable temperature	-41 ~ 150°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	法兰、对夹 Flange, wafer	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀座材质 Seat material	FEP/PCTFE/PFA/PO/PTFE
适用介质 Applicable media	水、污水、海水、气体、油类、酸碱类 Water, sewage, sea water, gas, oils, acids and bases	应用场合 Applications	给排水、化工、石油、造纸、空调、食品、医药、环保系统 Water supply and drainage, chemical industry, petroleum, paper making, air conditioning, food, medicine, environmental protection system

双偏心软密封蝶阀 Double Eccentric Soft Seal Butterfly Valve


公称通径 Nominal diameter	DN100 ~ DN2400mm	公称压力 Nominal pressure	150Lb(PN10 ~ PN16)
适用温度 Applicable temperature	-15°C~120°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对夹、法兰 Wafer, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀座材质 Seat material	NBR/EPDM/FPM/PTFE/ 硅橡胶 Silicone rubber
适用介质 Applicable media	淡水、油品等 Fresh water, oil etc	应用场合 Applications	给排水、化工、石油、造纸、空调、食品、医药、环保系统 Water supply and drainage, chemical industry, petroleum, paper making, air conditioning, food, medicine, environmental protection system

三偏心金属密封蝶阀 Triple Eccentric Metal Seal Butterfly Valve



公称通径 Nominal diameter	DN50 ~ DN300mm	公称压力 Nominal pressure	150Lb(PN10 ~ PN16)
适用温度 Applicable temperature	-196 ~ 550°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对夹、对焊、法兰 Wafer, weld, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	阀杆材质 Stem material	2Cr13/304/316/17-4PH
适用介质 Applicable media	水、气、油、弱腐蚀性介质、 腐蚀性介质 Water, gas, oil, weak corrosive medium, corrosive medium	应用场合 Applications	冶金、电力、石油石化、空气、煤气、 可燃气体、给排水 Metallurgy, electric power, petroleum and petrochemical, air, gas, combustible gas, water supply and drainage

通风蝶阀 Ventilation Butterfly Valve



公称通径 Nominal diameter	DN50 ~ DN300mm	公称压力 Nominal pressure	150Lb(PN1 ~ PN16)
适用温度 Applicable temperature	≤ 700°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	Q235A、16锰钢 Manganese steel、 不锈钢 Stainless steel	阀杆材质 Stem material	QB235/2Cr13/不锈钢 Stainless steel
适用介质 Applicable media	空气、热空气、煤气含尘气体、烟道 气体、腐蚀性烟气等 Air, hot air, gas dust gas, flue gas, corrosive smoke etc	应用场合 Applications	工业、能源、冶金、电力、环保等 Industry, energy, metallurgy, electric power, environmental protection, etc

伸缩蝶阀 Telescopic Butterfly Valve



公称通径 Nominal diameter	DN50 ~ DN1600mm	公称压力 Nominal pressure	150Lb(PN10 ~ PN16)
适用温度 Applicable temperature	≤ 425°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	镍铬铸铁、球墨铸铁、灰铸铁、碳钢、 不锈钢 Nickel-chromium cast iron, ductile cast iron, gray cast iron, carbon steel, stainless steel	阀杆材质 Stem material	QB235/2Cr13/不锈钢 Stainless steel
适用介质 Applicable media	空气、水、蒸气、油品、腐蚀性 介质、燃气 Air, water, steam, oil, corrosive medium, gas	应用场合 Applications	给排水、造纸等 Water supply and drainage, papermaking, etc

电动单座调节阀 Electric Single Seat Control Valve



公称通径 Nominal diameter	DN25 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-60 ~ 540°C	驱动方式 Driving mode	电动 Electric
连接方式 Connection mode	法兰、对焊 Flange, butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	填料材质 Packing material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

电动双座调节阀 Electric Double Seat Control Valve



公称通径 Nominal diameter	DN25 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-20 ~ 540°C	驱动方式 Driving mode	电动 Electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	填料材质 Packing material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

电动套筒调节阀 Electric Sleeve Control Valve



公称通径 Nominal diameter	DN20 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-60 ~ 450°C	驱动方式 Driving mode	电动 Electric
连接方式 Connection mode	法兰、对焊 Flange, butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	填料材质 Packing material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

电动三通调节阀 Electric Three-way Control Valve


公称通径 Nominal diameter	DN15 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-40 ~ 450°C	驱动方式 Driving mode	电动 Electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	阀杆材质 Stem material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

气动薄膜单座调节阀 Pneumatic Thin Film Single Seat Control Valve


公称通径 Nominal diameter	DN20 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-40 ~ 450°C	驱动方式 Driving mode	气动 Pneumatic
连接方式 Connection mode	法兰、对焊 Flange, butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	阀杆材质 Stem material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

气动薄膜双座调节阀 Pneumatic Film Two-Seat Control Valve


公称通径 Nominal diameter	DN20 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-40 ~ 450°C	驱动方式 Driving mode	气动 Pneumatic
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	阀杆材质 Stem material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

气动薄膜三通调节阀 Pneumatic Film Tee Control Valve


公称通径 Nominal diameter	DN25 ~ DN200mm	公称压力 Nominal pressure	PN10 ~ PN100MPa
适用温度 Applicable temperature	-40 ~ 450°C	驱动方式 Driving mode	气动 Pneumatic
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	WCB/CF8/CF8M/CF3/CF3M	阀杆材质 Stem material	V型聚四氟乙烯、柔性石墨 V-type ptFE, flexible graphite
适用介质 Applicable media	气体、液体、蒸汽等的控制调节 Control and regulation of gases, liquids, vapors, etc		

低温截止阀 Cryogenic Globe Valve


公称通径 Nominal diameter	3/8"~16" (DN10-DN400mm)	公称压力 Nominal pressure	150 ~ 1500Lb (PN16-PN250MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/LCB	阀瓣材质 Disc material	F304/LF2+13Cr
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温球阀 Cryogenic Ball Valve


公称通径 Nominal diameter	1/2"~24" (DN15-DN600mm)	公称压力 Nominal pressure	150 ~ 900Lb (PN16-PN150MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	LF2/LF5/LF9/LF3/F304/F316/ F304L/F316L/LCB/LCC/LC1/ LC2/LC3/CF8/CF8M/CF3M	球芯材质 Ball core material	F304/F316 F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温止回阀 Cryogenic Check Valve


公称通径 Nominal diameter	1/2"~24" (DN15-DN600mm)	公称压力 Nominal pressure	150 ~ 900Lb (PN16-PN150MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	ASME
阀体材质 Body material	CF8/LCB	阀瓣材质 Disc material	F304/LF2+13Cr
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温闸阀 Cryogenic Gate Valve



公称通径 Nominal diameter	1/2"~28" (DN15 ~ DN700mm)	公称压力 Nominal pressure	150 ~ 1500Lb (PN16~PN250MPa)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/LCB	闸板材质 Gate material	CF8、LCB+STL
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温蝶阀 Cryogenic Butterfly Valve



公称通径 Nominal diameter	2"~40" (DN50~DN1000mm)	公称压力 Nominal pressure	150 ~ 600Lb (PN16~PN100MPa)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF3/LCB	阀板材质 Plate material	CF8/CF3/LCB+STL
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温紧急切断阀 Cryogenic Emergency Shut-off Valve



公称通径 Nominal diameter	1/2"~8" (DN15 ~ DN200mm)	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN63MPa)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	手动、气动 Manual and pneumatic
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/CF3/CF3M	阀芯材质 Core material	F304/F316/F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温气动调节阀 Cryogenic Pneumatic Control Valve



公称通径 Nominal diameter	1/2"~8" (DN20 ~ DN200mm)	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN63MPa)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	手动、气动 Manual, pneumatic
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/CF3/CF3M	阀芯材质 Core material	F304/F316/F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温安全阀 Cryogenic Safety Valve



公称通径 Nominal diameter	DN8 ~ DN40mm	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN40MPa)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	H62/CF8/CF8M/CF3/CF3M	阀芯材质 Core material	F304/F316/F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温减压阀 Cryogenic Pressure Reducing Valve



公称通径 Nominal diameter	DN8 ~ DN50mm	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN40)
适用温度 Applicable temperature	-196 ~ 80℃	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/CF3/CF3M	阀瓣材质 Disc material	F304/F316/F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温自力式调节阀 Cryogenic Self-Control Valve



公称通径 Nominal diameter	DN25 ~ DN150mm	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN40MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/ CF3/CF3M	阀芯材质 Core material	F304/F316/F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温三通阀 Cryogenic Three-way Valve



公称通径 Nominal diameter	DN25mm	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN40MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/ CF3/CF3M	阀芯材质 Core material	F304/F316 F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

低温过滤器 Cryogenic Filter



公称通径 Nominal diameter	DN10 ~ DN100mm	公称压力 Nominal pressure	150 ~ 300Lb (PN16~PN40MPa)
适用温度 Applicable temperature	-196 ~ 80°C	驱动方式 Driving mode	
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	CF8/CF8M/ CF3/CF3M	阀芯材质 Core material	F304/F316 F304L/F316L
适用介质 Applicable media	LNG、LPG、LEG、LO ₂ 、LN ₂ 、LAr	应用场合 Applications	液化气运输船/接收站/撬装/罐区、空分 LPG carrier/receiving station/skid loading/tank farm, air separation

弹性座封闸阀 Elastic Seat Seal Gate Valve



公称通径 Nominal diameter	DN40 ~ DN1000mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤ 120°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	沟槽、法兰 Groove, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB	阀杆材质 Stem material	碳钢、不锈钢 Carbon steel, stainless steel
适用介质 Applicable media	水、油、气及非腐蚀性介质 Water, oil, gas and non corrosive medium	应用场合 Applications	自来水、污水、建筑、食品、医药等 Tap water, sewage, construction, food, medicine, etc

铜芯闸阀 Copper Gate Valve



公称通径 Nominal diameter	DN40 ~ DN500mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤ 120°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	沟槽、法兰 Groove, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB	阀杆材质 Stem material	碳钢、不锈钢 Carbon steel, stainless steel
适用介质 Applicable media	水、油、气及非腐蚀性介质 Water, oil, gas and non corrosive medium	应用场合 Applications	自来水、污水、建筑、食品、医药等 Tap water, sewage, construction, food, medicine, etc

刀型闸阀 Knife Gate Valve



公称通径 Nominal diameter	DN50 ~ DN1200mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤ 425°C	驱动方式 Driving mode	手动、气动、电动 Manual, pneumatic, electric
连接方式 Connection mode	法兰、对夹 Flange, wafer	连接标准 Connection standard	GB、ASME
阀体材质 Body material	不锈钢/碳钢/灰铸铁 Stainless steel / carbon steel / grey cast iron	闸板材质 Gate material	碳钢/不锈钢 Carbon steel/stainless steel
适用介质 Applicable media	糖浆、纸浆、污水、煤浆、灰、渣水混合物 Syrup, pulp, sewage, coal slurry, ash, slag water mixture	应用场合 Applications	水处理、造纸、电力、化工、采矿、环保 Water treatment, papermaking, electric power, chemical industry, mining, environmental protection

调流调压阀 Regulating Valve



公称通径 Nominal diameter	DN200 ~ DN2000mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	-20℃	驱动方式 Driving mode	手动、电动 Manual, electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	QT450/WCB	阀芯材质 Core material	304/316
适用介质 Applicable media	原水、清水、空气、天然气、煤气、蒸气 Raw water, clean water, air, natural gas, gas, steam	应用场合 Applications	水位、减压、止回、持压泄压、流量、破管关闭等综合控制需求的系统 Water level, reduced pressure, check, holding pressure relief, flow, broken pipe closure and other integrated control requirements of the system

管夹阀 Pipe Force Valve



公称通径 Nominal diameter	2"~40" (DN50~DN1000mm)	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0 ~ 120℃	驱动方式 Driving mode	手动、电动 Manual, electric
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	WCB/CF8	密封材质 Sealing material	EPDM
适用介质 Applicable media	清水、原水、渣浆、油品 Clean water, raw water, slurry and oil	应用场合 Applications	给排水、污水、化工液体等泵站控制输送系统 Water supply and drainage, sewage, chemical fluid and other pumping stations control transmission system

双向旋球阀 Two-way Rotary Ball Valve



公称通径 Nominal diameter	DN50 ~ DN2000mm	公称压力 Nominal pressure	PN10 ~ PN16Mpa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	手动、电动、气动、液动 Manual, electric, pneumatic, hydraulic
连接方式 Connection mode	对夹、法兰 Wafer, flange	连接标准 Connection standard	GB, API
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀芯材质 Core material	WCB/CF8/CF8M
适用介质 Applicable media	水、污水 Water and sewage	应用场合 Applications	冶金、矿山、石化、化工、电力、环保、市政等行业给排水系统的双向控制 Two-way control of water supply and drainage system in metallurgy, mining, petrochemical, chemical industry, electric power, environmental protection, municipal administration and other industries

DF倒流防止器 DF Backflow Preventer



公称通径 Nominal diameter	DN40 ~ DN200mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀杆材质 Stem material	铝青铜、铬不锈钢 Aluminum bronze, chromium stainless steel
适用介质 Applicable media	清水 Clear water	应用场合 Applications	供水系统、消防用水系统、空调制冷系统、市政供水管道系统 Water supply system, fire water system, air conditioning water system, municipal water supply piping system

倒流防止器 Backflow Preventer



公称通径 Nominal diameter	DN15 ~ DN400mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀杆材质 Stem material	铝青铜、铬不锈钢 Aluminum bronze, chromium stainless steel
适用介质 Applicable media	清水 Clear water	应用场合 Applications	供水系统、消防用水系统、空调制冷系统、市政供水管道系统 Water supply system, fire water system, air conditioning water system, municipal water supply piping system

低阻力倒流防止器 Low Resistance Backflow Preventer



公称通径 Nominal diameter	DN50 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀芯材质 Core material	304/316
适用介质 Applicable media	清水 Clear water	应用场合 Applications	供水系统、消防用水系统、空调制冷系统、市政供水管道系统 Water supply system, fire water system, air conditioning water system, municipal water supply piping system

静音止回阀 Mute Check Valve


公称通径 Nominal diameter	DN50 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	青铜、不锈钢 Bronze, stainless steel
适用介质 Applicable media	水、污水、油等 Water, sewage, oil, etc	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

消声止回阀 Silencing Check Valve


公称通径 Nominal diameter	DN40 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	铝青铜、铬不锈钢Aluminum bronze, chromium stainless steel
适用介质 Applicable media	水、油等 Water, oil, etc	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

微阻缓闭止回阀 Micro Resistance Slow Closing Check Valve


公称通径 Nominal diameter	DN20 ~ DN1200mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	钢板橡胶组合件、不锈钢、碳钢 Steel plate rubber assembly, stainless steel, carbon steel
适用介质 Applicable media	水、污水 Water and sewage	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

蝶式缓闭消声止回阀 Butterfly Slow Closing Silencing Check Valve


公称通径 Nominal diameter	DN100 ~ DN1200mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	15 ~ 80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	QT450/WCB/CF8/CF8M	阀芯材质 Core material	
适用介质 Applicable media	水、污水 Water and sewage	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

蝶式止回阀 Butterfly Check Valve


公称通径 Nominal diameter	DN50 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	-15~80℃	驱动方式 Driving mode	
连接方式 Connection mode	对夹 Wafer	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀座材质 Seat material	乙丙橡胶、氯丁橡胶、丁腈橡胶、聚四氟乙烯、不锈钢 Ethylene propylene rubber, neoprene rubber, butadiene rubber, teflon, stainless steel
适用介质 Applicable media	水、气、油等 Water, gas, oil, etc	应用场合 Applications	食品、医药、轻纺、造纸、给排水 Food, medicine, light textile, paper, water supply and drainage

橡胶瓣止回阀 Rubber Disc Check Valve


公称通径 Nominal diameter	DN50 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	橡胶组合件 Rubber assembly
适用介质 Applicable media	水、油等 Water, oil, etc	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

球形止回阀 Ball Check Valve


公称通径 Nominal diameter	DN50 ~ DN350mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	球体材质 Sphere material	钢体外包橡胶 Steel body covered with rubber
适用介质 Applicable media	水、油等 Water, oil, etc	应用场合 Applications	冷水、热水、工业用水及生活污水管道 Cold water, hot water, industrial water and domestic sewage pipes

限流止回阀 Current Limit Check Valve


公称通径 Nominal diameter	DN50 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀芯材质 Core material	CS or SS+NBR
适用介质 Applicable media	水 Water	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

液压水位控制阀 Hydraulic Level Control Valve


公称通径 Nominal diameter	DN80 ~ DN350mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	手动 Manual
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	薄膜材质 Film material	尼龙强化橡胶 Nylon reinforced rubber
适用介质 Applicable media	清水 Clear water	应用场合 Applications	工矿、民用建筑水箱、水塔 Industrial and mining, civil construction water tank, water tower

100X遥控浮球阀 100X Remote Float Valve


公称通径 Nominal diameter	DN20 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	≤80℃	驱动方式 Driving mode	
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水、海水、油品 Water, sea water, oil	应用场合 Applications	水池、水塔、水塘进水管 Water inlet pipe of pool, tower, pond

200X减压阀 200X Pressure Reducing Valve


公称通径 Nominal diameter	DN20 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	消防给水、生活给水、消防供水及其他工业给水系统 Fire water supply, domestic water supply, fire water supply and other industrial water supply systems

300X缓闭式止回阀 300X Slow-closing Check Valve


公称通径 Nominal diameter	DN20 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	高层建筑给水系统 Water supply system for high-rise buildings

400X流量控制阀 400X Flow Control Valve


公称通径 Nominal diameter	DN25 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	工业给水管道 Industrial water supply pipeline

500X持压泄压阀 500X Pressure Holding Relief Valve


公称通径 Nominal diameter	DN25 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀芯材质 Core material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	给排水及工业系统中的自动控制 Automatic control of water supply and drainage and industrial systems

600X电动控制阀 600X Electric Control Valve


公称通径 Nominal diameter	DN25 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	空调系统供/回水之间以平衡压差 Air conditioning system supply/return water to balance the differential pressure

700X水泵控制阀 700X Pump Control Valve


公称通径 Nominal diameter	DN25 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	高层建筑和其他给水系统的水泵出口处 Water pump outlets in high-rise buildings and other water supply systems

800X压差旁通阀 800X Differential Bypass Valve


公称通径 Nominal diameter	DN50 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	空调系统供/回水之间以平衡压差 Air conditioning system supply/return water to balance the differential pressure

900X紧急关闭阀 900X Emergency Shutoff Valve


公称通径 Nominal diameter	DN25 ~ DN800mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	消防系统、供水系统 Fire fighting system, water supply system

JD745X多功能水泵控制阀 JD745X Multi-function Pump Control Valve



公称通径 Nominal diameter	DN40 ~ DN160mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	2Cr13
适用介质 Applicable media	水 Water	应用场合 Applications	高层建筑、市政系统的给排水管道出口 Outlet of water supply and drainage pipeline of high-rise building, municipal system

过滤活塞式多功能水力阀 Filter Piston Type Multi-function Hydraulic Valve



公称通径 Nominal diameter	DN40 ~ DN400mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀芯材质 Core material	QT450/WCB/CF8/CF8M+NBR
适用介质 Applicable media	水 Water	应用场合 Applications	给水、消防、暖通管道 Water supply, fire fighting, HVAC piping

平衡阀 Balance Valve



公称通径 Nominal diameter	DN15 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0 ~ 100℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	不锈钢 Stainless steel
适用介质 Applicable media	水 Water	应用场合 Applications	供热系统 Heating system

数字锁定平衡阀 Digital Locking Balancing Valve



公称通径 Nominal diameter	DN15 ~ DN500mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0 ~ 120℃	驱动方式 Driving mode	
连接方式 Connection mode	螺纹、法兰 Thread, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	不锈钢 Stainless steel
适用介质 Applicable media	水 Water	应用场合 Applications	主干、分支干、室内供水干管分支立管及 多合锅炉 Trunk, branch trunk, indoor water supply main, branch riser and multiple boilers

自力式流量平衡阀 Self-propelled Flow Balancing Valve



公称通径 Nominal diameter	DN32 ~ DN350mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀芯材质 Core material	CF8/CF8M/CF3/CF3M
适用介质 Applicable media	水, 油 Water, oil	应用场合 Applications	供热空调等非腐蚀性的流量控制系统 Non corrosive flow control system for heating and air conditioning

压差平衡阀 Differential Pressure Balancing Valve



公称通径 Nominal diameter	DN15 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0 ~ 100℃	驱动方式 Driving mode	手动、气动 Manual, pneumatic
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	不锈钢、铜 Stainless steel, copper
适用介质 Applicable media	水 Water	应用场合 Applications	供暖系统 Heating system

动态平衡电动调节（开关）阀 Dynamic Balance Electric Regulating (switching) Valve



公称通径 Nominal diameter	DN40 ~ DN200mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~100℃	驱动方式 Driving mode	电动Electric
连接方式 Connection mode	法兰、螺纹、对焊 Flange, thread, butt welding	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	密封材质 Sealing material	PTFE
适用介质 Applicable media	水 Water	应用场合 Applications	暖通空调系统HVAC system

分户减压阀 Household Pressure Reducing Valve



公称通径 Nominal diameter	DN20 ~ DN25mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	自来水60℃以下 Tap water below 60℃	驱动方式 Driving mode	
连接方式 Connection mode	螺纹Thread	连接标准 Connection standard	GB、ASME
阀体材质 Body material	铜Copper	阀芯材质 Core material	
适用介质 Applicable media	水 Water	应用场合 Applications	楼宇供水 Building water supply

三合一多功能控制阀 Three In One Multifunctional Control Valve



公称通径 Nominal diameter	DN50 ~ DN600mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀座材质 Seat material	不锈钢Stainless steel
适用介质 Applicable media	水，油 Water, oil	应用场合 Applications	建筑、公寓及工厂的给排水、冷暖水处理 Water supply and drainage, heating and cooling water treatment for buildings, apartments and factories

复合排气阀 Compound Exhaust Valve



公称通径 Nominal diameter	DN50~DN300mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	不锈钢Stainless steel
适用介质 Applicable media	清水(污水不可用) Clean water (sewage is not available)	应用场合 Applications	输配管线 Transmission and distribution pipeline

污水排气阀 Sewage Vent Valve



公称通径 Nominal diameter	DN50~DN300mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	不锈钢Stainless steel
适用介质 Applicable media	污水 Sewage	应用场合 Applications	污水管线 Sewage pipeline

单口排气阀 Single Port Exhaust Valve



公称通径 Nominal diameter	DN25 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰、螺纹 Flange, thread	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀瓣材质 Disc material	不锈钢Stainless steel
适用介质 Applicable media	清水 Clean water	应用场合 Applications	输配管线 Transmission and distribution pipeline

扩散过滤器 Diffusion Filter


公称通径 Nominal diameter	DN65 ~ DN500mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	手动、气动 Manual, pneumatic
连接方式 Connection mode	对焊、法兰 Butt welding, flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	QT450/WCB/CF8/CF8M	上盖材质 Cover material	QT450/WCB/CF8/CF8M
适用介质 Applicable media	污水 Sewage	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

Y型过滤器 Y-type Filter


公称通径 Nominal diameter	DN20 ~ DN500mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~400℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	过滤网材质 Strainer material	不锈钢 Stainless steel
适用介质 Applicable media	水、油、气 Water, oil, gas	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system

防逆水封阀 Anti Reverse Water Seal Valve


公称通径 Nominal diameter	DN80 ~ DN1200mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0 ~ 80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB
阀体材质 Body material	QT450/碳钢 Carbon steel	阀芯材质 Core material	橡胶密封 Rubber seal
适用介质 Applicable media	清水、污水 Clean water and sewage	应用场合 Applications	干清、暴雨、溢流管道上，平时阀门有水时可防止下水管道臭气进入清水池，暴雨或下水管道堵塞等造成雨水管水位增高时可防止污水倒灌清水池 Dry clearing, rain or overflow pipelines, usually there is water seal valve to prevent the sewage pipe smell into the clear tank, due to rain or sewer blockage and other caused by rain sewage pipe water level can prevent sewage back filling clear tank

排泥阀 Mud Valve


公称通径 Nominal diameter	DN80 ~ DN400mm	公称压力 Nominal pressure	PN10 ~ PN16MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	HT/QT450/WCB/CF8/CF8M	阀杆材质 Stem material	不锈钢 Stainless steel
适用介质 Applicable media	水、污水 Water and sewage	应用场合 Applications	通常安装在沉淀池底部外侧壁 Usually installed in the bottom of the sedimentation tank on the outer wall

水锤消除器 Water Hammer Eliminator


公称通径 Nominal diameter	DN40 ~ DN300mm	公称压力 Nominal pressure	PN10 ~ PN25MPa
适用温度 Applicable temperature	0~80℃	驱动方式 Driving mode	
连接方式 Connection mode	法兰 Flange	连接标准 Connection standard	GB、ASME
阀体材质 Body material	304/316/304L/316L	活塞材质 Piston material	304/316/304L/316L
适用介质 Applicable media	水 Water	应用场合 Applications	给排水、消防、暖通系统 Water supply and drainage, fire protection, HVAC system